

# TECHNICAL DATA FOR A800 WITH ACCESSORIES, PLUS ADDITIONAL COMPATIBLE ACCESSORIES

## MACHINE MODELS

MODEL	POWER
A800	220-240V 1LNPE 50/60Hz 2.6-3.0kW (16A)
A800 FM EC	380-415V 3LNPE 50/60Hz 6.7-7.9kW (16A)
	220-240V 1LNPE 50/60Hz 4.4-5.2kW (30A)
	220-240V 3LPE 50/60Hz 5.6-7.9kW (30A)
	200-220V 2LPE 60Hz 4.5-5.3kW (30A)
	200-220V 2LPE 50/60Hz 4.5-5.3kW (30A)
	200-220V 3LPE 50/60Hz 6.8-8.1kW (30A)
	380V 3LNPE 50/60Hz 6.7kW (16A)
Dimensions:	340 mm / 750 mm / 600 mm (W/H/D)

## COLOR OPTIONS

Black/chrome or anthracite/chrome

## WATER CONNECTION

Fixed water connection	Metal hose with union nut G3/8", L = 1500 mm
Water supply line	If possible on installation side: untreated water of drinking water quality (not from household decalcification system)
Water pressure	80 - 800 kPa (0.8 - 8.0 bar)
Total hardness	4-8 °dH GH (German total hardness) / 7-14 °fH GH (French total hardness) / 70-140 ppm (mg/l)
Carbonate hardness	3-6 °dH KH (carbonate hardness) / 50-105 ppm (mg/l)
Acid content / pH value	6.5-7.5 pH
Chlorine content	<0.5 mg/l





## WATER DRAIN

Drain hose Dia. = 16 mm, L = 2000 mm

## ACCESSORIES


1) REFRIGERATION UNIT	SU12 EC (12 l)
Electrical connection:	220-240V 1LNPE 50/60Hz 0.72A (10A) 110-127V 1LNPE 60Hz 1.5-1.7A (10A) 220V 1LNPE 50Hz 0.72A (10A) 100V 1LNPE 50/60Hz 1.7A (10A)
Dimensions:	340 mm / 540 mm / 475 mm (W/H/D)
Weight (empty):	approx. 28 kg
Compatible with:	Model A800 FM EC
Colors:	Black or anthracite

REFRIGERATION UNIT	SU05 EC (5 l)
Electrical connection:	220-240V 1LNPE 50/60Hz 0.72A (10A) 120V 1LNPE 60Hz 1.5A (10A) 220V 1LNPE 50Hz 0.72A (10A) 100V 1LNPE 50/60Hz 1.65A (10A)
Dimensions:	270 mm / 540 mm / 475 mm (W/H/D)
Weight (empty):	approx. 20 kg
Compatible with:	Model A800 FM EC
Colors:	Black or anthracite

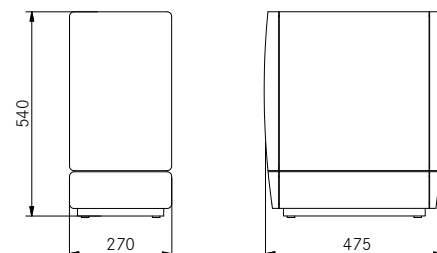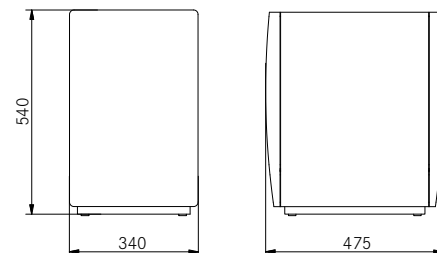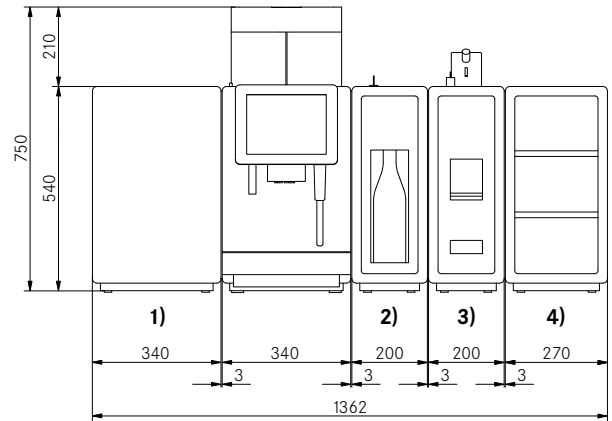


**2) FLAVOR STATION FS3**

Electrical connection:	100–240 V 1LNPE 50/60 Hz 75 W (10 A)
Dimensions:	200 mm / 540 mm / 453 mm (W/H/D)
Weight (empty):	approx. 18 kg
Compatible with:	Model A800 FM EC
Colors:	Black or anthracite

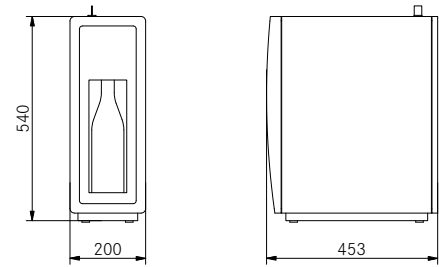


**3) ACCOUNTING SYSTEM AC**

Electrical connection:	85–264 V 1LNPE 50/60 Hz (10 A)
Dimensions:	200 mm / 630 mm / 453 mm (W/H/D)
Weight (empty):	approx. 18 kg
Compatible with:	Model A800 / A800 FM EC
Colors:	Black or anthracite

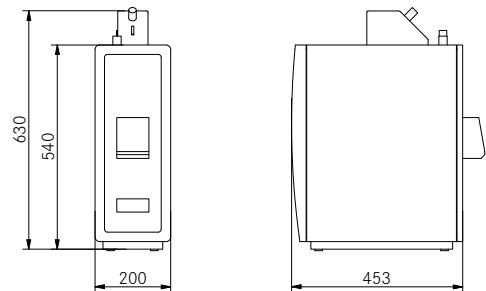


**4) CUP WARMER CW**

Electrical connection:	220–240 V 1LNPE 50/60 Hz 120 W (10 A) 110 V 1LNPE 50/60 Hz 80 W (10 A)
Dimensions:	270 mm / 540 mm / 454 mm (W/H/D)
Weight (empty):	approx. 20 kg
Compatible with:	Model A800 / A800 FM EC
Colors:	Black or anthracite

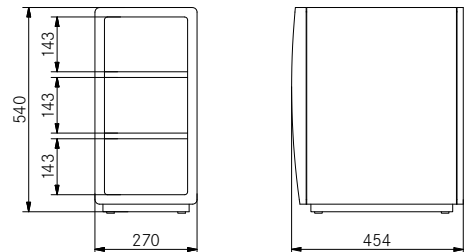


**REFRIGERATION UNIT KE200 (4 I)**

Electrical connection:	220–240 V 1LNPE 50/60 Hz 0.71 A (10 A)
Dimensions:	225 mm / 507 mm / 453 mm (W/H/D)
Weight (empty):	approx. 13 kg
Compatible with:	Model A800 FM EC
Color:	Stainless steel

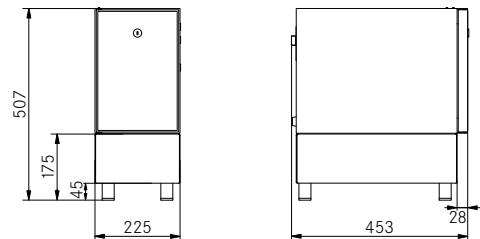

**BASE REFRIGERATION UNIT UC05 (5 I)**

Electrical connection:	220–240 V 1LNPE 50/60 Hz 1.0 A (10 A)
Dimensions:	320 mm / 238 mm / 646 mm (W/H/D)
Weight (empty):	approx. 27 kg
Compatible with:	Model A800 FM EC
Color:	Stainless steel

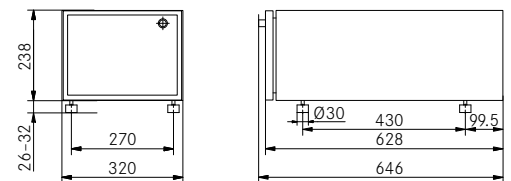

**CHILL & CUP CC**

Electrical connection:	220–240 V 1LNPE 50/60 Hz 1.0 A (10 A)
Dimensions:	380 mm / 581 mm / 473 mm (W/H/D)
Weight (empty):	approx. 29 kg
Compatible with:	Model A800 FM EC
Color:	Black

