


TECHNICAL DATA FOR A600 WITH ACCESSORIES, PLUS ADDITIONAL COMPATIBLE ACCESSORIES

MACHINE MODELS

MODEL	POWER
A600	220-240V 1LNPE 50/60Hz 2.4-2.8kW (13/15/16* A)
A600 MS EC	220V 1LNPE 50Hz 2.4kW (16A)
A600 FM CM	220-220V 2LPE 60Hz 4.5-5.3kW (30A) 230V 1LNPE 50/60Hz 2.1-2.3kW (10A) 200V 2LPE 50/60Hz 2.0kW (15A)
A600 FM EC	200-240V 1LNPE 50/60Hz 2.4-2.8kW (13/15/16* A) 380-415V 3LNPE 50/60Hz 6.3-7.5kW (16A) 220-240V 1LNPE 50/60Hz 4.4-5.0kW (30A) 220-240V 3LPE 50/60Hz 5.6-7.9kW (30A) 200V 2LPE 50/60Hz 2.0kW (15A) 200V 2LPE 50/60Hz 4.5kW (30A) 200V 3LPE 50/60Hz 6.8kW (30A) 220V 1LNPE 50Hz 2.4kW (16A) 380V 3LNPE 50Hz 6.3kW (16A) 200-220V 2LPE 60Hz 4.5-5.3kW (30A)
Dimensions:	340 mm / 750 mm / 600 mm (W/H/D)

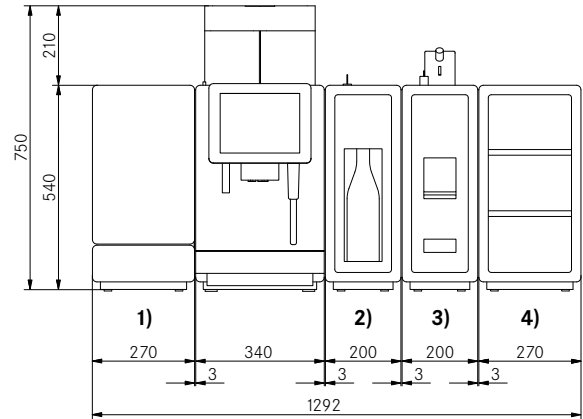


COLOR OPTIONS

Black/chrome or anthracite/chrome

WATER CONNECTION

Fixed water connection	Metal hose with union nut G3/8", L = 1500 mm
Water supply line	If possible on installation side: untreated water of drinking water quality (not from household decalcification system)
Water pressure	80-800 kPa (0.8-8.0 bar)
Total hardness	4-8 °dH GH (German total hardness) / 7-14 °fH GH (French total hardness) / 70-140 ppm (mg/l)
Carbonate hardness	3-6 °dH KH (carbonate hardness) / 50-105 ppm (mg/l)
Acid content/pH value	6.5-7.5 pH
Chlorine content	<0.5 mg/l




WATER DRAIN

Drain hose	Dia. = 16 mm, L = 2000 mm
------------	---------------------------

ACCESSORIES

1) REFRIGERATION UNIT	SU05 EC (5I)
Electrical connection:	220-240V 1LNPE 50/60Hz 0.72A (10A) 120V 1LNPE 60Hz 1.5A (10A) 220V 1LNPE 50Hz 0.72A (10A) 100V 1LNPE 50/60Hz 1.65A (10A)
Dimensions:	270 mm / 540 mm / 475 mm (W/H/D)
Weight (empty):	approx. 20 kg
Compatible with:	Model A600 MS EC / A600 FM EC
Colors:	Black or anthracite

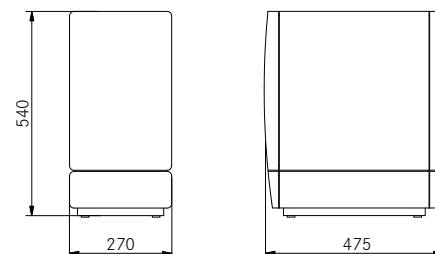


1) REFRIGERATION UNIT	SU05 CM (5I)
Electrical connection:	220-240V 1LNPE 50/60Hz 1.95-2.3kW (10A) 120V 1LNPE 60Hz 1.44kW (15A) 220V 1LNPE 50Hz 0.72A (10A) 100V 1LNPE 50/60Hz 1.35kW (15A)
Dimensions:	270 mm / 540 mm / 475 mm (W/H/D)
Weight (empty):	approx. 24 kg
Compatible with:	Model A600 FM CM
Colors:	Black or anthracite


*Fuse varies by country




REFRIGERATION UNIT	SU12 EC (12 I)
Electrical connection:	220-240 V 1LNPE 50/60 Hz 0.72 A (10 A) 110-127 V 1LNPE 60 Hz 1.5-1.7 A (10 A) 220 V 1LNPE 50 Hz 0.72 A (10 A) 100 V 1LNPE 50/60 Hz 1.7 A (10 A)
Dimensions:	340 mm / 540 mm / 475 mm (W/H/D)
Weight (empty):	approx. 28 kg
Compatible with:	Model A600 MS EC / A600 FM EC
Colors:	Black or anthracite

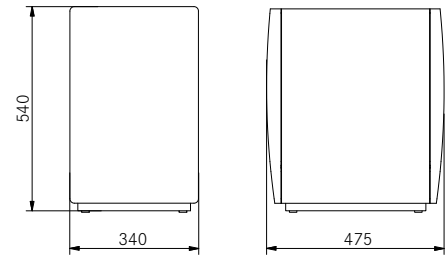


2) FLAVOR STATION	FS3
Electrical connection:	100-240 V 1LNPE 50/60 Hz 75 W (10 A)
Dimensions:	200 mm / 540 mm / 453 mm (W/H/D)
Weight (empty):	approx. 18 kg
Compatible with:	Model A600 FM EC / A600 FM CM
Colors:	Black or anthracite

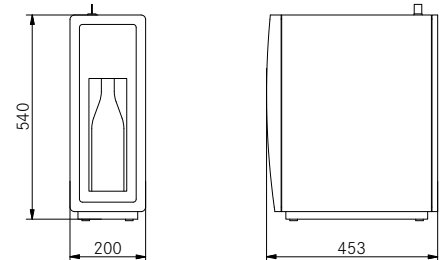


3) ACCOUNTING SYSTEM	AC
Electrical connection:	85-264 V 1LNPE 50/60 Hz (10 A)
Dimensions:	200 mm / 630 mm / 453 mm (W/H/D)
Weight (empty):	approx. 18 kg
Compatible with:	Model A600 / A600 MS EC / A600 FM EC / A600 FM CM
Colors:	Black or anthracite

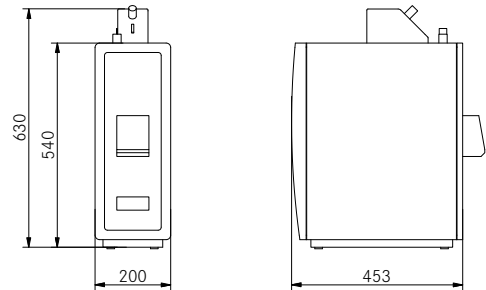


4) CUP WARMER	CW
Electrical connection:	220-240 V 1LNPE 50/60 Hz 120 W (10 A) 110 V 1LNPE 50/60 Hz 80 W (10 A)
Dimensions:	270 mm / 540 mm / 454 mm (W/H/D)
Weight (empty):	approx. 20 kg
Compatible with:	Model A600 / A600 MS EC / A600 FM EC / A600 FM CM
Colors:	Black or anthracite

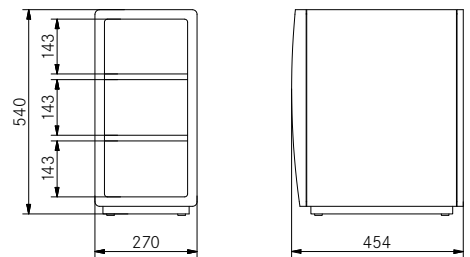

REFRIGERATION UNIT	KE200 (4 I)
Electrical connection:	220-240 V 1LNPE 50/60 Hz 0.71 A (10 A)
Dimensions:	225 mm / 507 mm / 453 mm (W/H/D)
Weight (empty):	approx. 13 kg
Compatible with:	Model A600 MS EC / A600 FM EC
Color:	Stainless steel

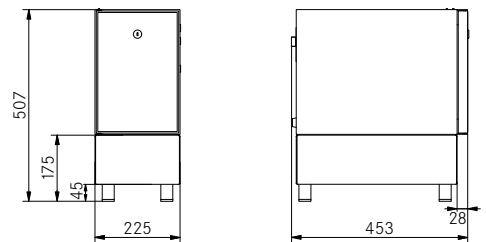

BASE REFRIGERATION UNIT	UC05 (5 I)
Electrical connection:	220-240 V 1LNPE 50/60 Hz 1.0 A (10 A)
Dimensions:	320 mm / 238 mm / 646 mm (W/H/D)
Weight (empty):	approx. 27 kg
Compatible with:	Model A600 MS EC / A600 FM EC
Color:	Stainless steel

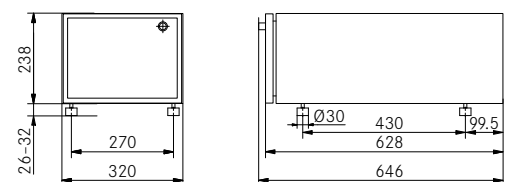

CHILL & CUP	CC
Electrical connection:	220-240 V 1LNPE 50/60 Hz 1.0 A (10 A)
Dimensions:	380 mm / 581 mm / 473 mm (W/H/D)
Weight (empty):	approx. 29 kg
Compatible with:	Model A600 MS EC / A600 FM EC
Color:	Black

